
Mobile Communications

Chapter 2: Wireless Transmission

Prof. Dr.-Ing. Jochen Schiller

Lecturer : Mansour Roustazadeh


- Frequencies
- Signals
- Antenna
- Signal propagation
- Multiplexing
- Spread spectrum
- Modulation
- Cellular systems

SMS : 0939 - 101 0024

eMail : AWN@EXIST.IR



Frequencies for communication

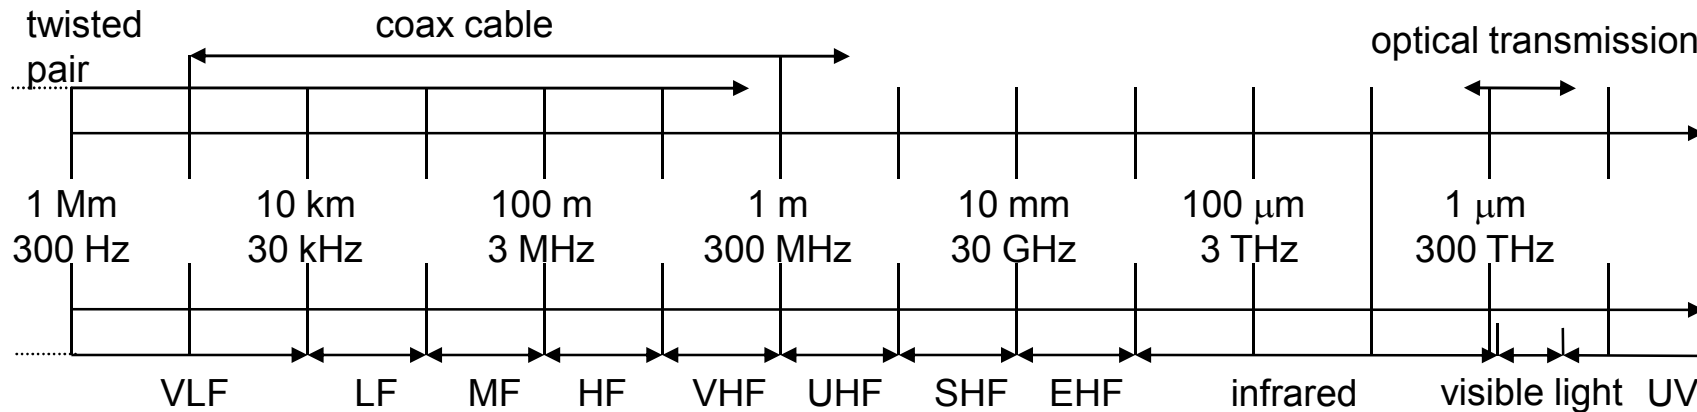

VLF = Very Low Frequency

LF = Low Frequency

MF = Medium Frequency

HF = High Frequency

VHF = Very High Frequency

UHF = Ultra High Frequency

SHF = Super High Frequency

EHF = Extra High Frequency

UV = Ultraviolet Light

Frequency and wave length:

$$\lambda = c/f$$

wave length λ , speed of light $c \cong 3 \times 10^8 \text{m/s}$, frequency f



Frequencies for mobile communication

- ❑ VHF-/UHF-ranges for mobile radio
 - ❑ simple, small antenna for cars
 - ❑ deterministic propagation characteristics, reliable connections
- ❑ SHF and higher for directed radio links, satellite communication
 - ❑ small antenna, focusing
 - ❑ large bandwidth available
- ❑ Wireless LANs use frequencies in UHF to SHF spectrum
 - ❑ some systems planned up to EHF
 - ❑ limitations due to absorption by water and oxygen molecules (resonance frequencies)
 - weather dependent fading, signal loss caused by heavy rainfall etc.



Frequencies and regulations

ITU-R holds auctions for new frequencies, manages frequency bands worldwide (WRC, World Radio Conferences)

	Europe	USA	Japan
Cellular Phones	GSM 450-457, 479-486/460-467, 489-496, 890-915/935-960, 1710-1785/1805-1880 UMTS (FDD) 1920-1980, 2110-2190 UMTS (TDD) 1900-1920, 2020-2025	AMPS, TDMA, CDMA 824-849, 869-894 TDMA, CDMA, GSM 1850-1910, 1930-1990	PDC 810-826, 940-956, 1429-1465, 1477-1513
Cordless Phones	CT1+ 885-887, 930-932 CT2 864-868 DECT 1880-1900	PACS 1850-1910, 1930-1990 PACS-UB 1910-1930	PHS 1895-1918 JCT 254-380
Wireless LANs	IEEE 802.11 2400-2483 HIPERLAN 2 5150-5350, 5470-5725	902-928 IEEE 802.11 2400-2483 5150-5350, 5725-5825	IEEE 802.11 2471-2497 5150-5250
Others	RF-Control 27, 128, 418, 433, 868	RF-Control 315, 915	RF-Control 426, 868



Signals I


- ❑ physical representation of data
- ❑ function of time and location
- ❑ signal parameters: parameters representing the value of data
- ❑ classification
 - ❑ continuous time/discrete time
 - ❑ continuous values/discrete values
 - ❑ analog signal = continuous time and continuous values
 - ❑ digital signal = discrete time and discrete values
- ❑ signal parameters of periodic signals:
period T , frequency $f=1/T$, amplitude A , phase shift φ
 - ❑ sine wave as special periodic signal for a carrier:

$$s(t) = A_t \sin(2 \pi f_t t + \varphi_t)$$




Fourier representation of periodic signals

$$g(t) = \frac{1}{2}c + \sum_{n=1}^{\infty} a_n \sin(2\pi nft) + \sum_{n=1}^{\infty} b_n \cos(2\pi nft)$$

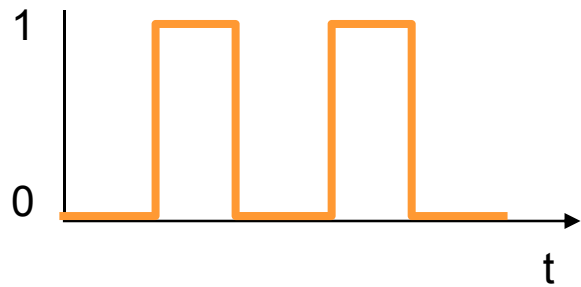

ideal periodic signal

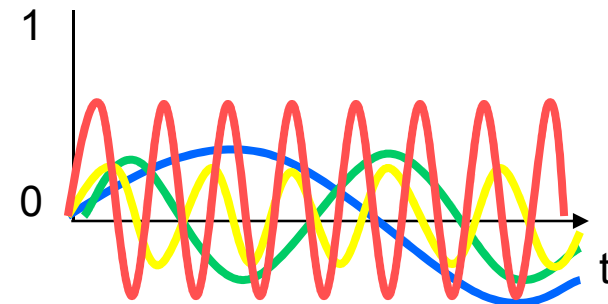


real composition
(based on harmonics)



Signals II

- Different representations of signals
 - amplitude (amplitude domain)
 - frequency spectrum (frequency domain)
 - phase state diagram (amplitude M and phase φ in polar coordinates)

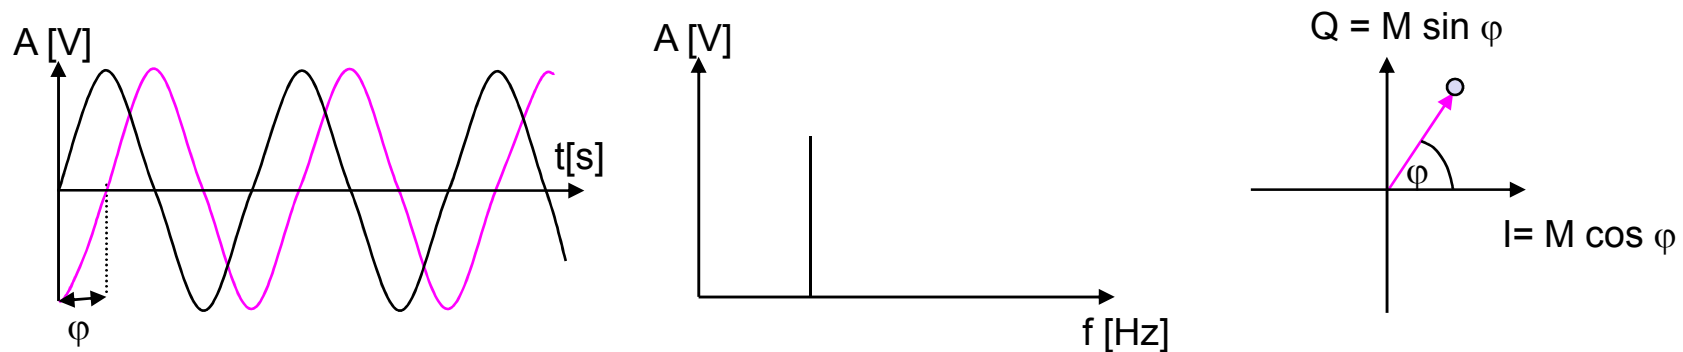

- Composed signals transferred into frequency domain using Fourier transformation
- Digital signals need
 - infinite frequencies for perfect transmission
 - modulation with a carrier frequency for transmission (analog signal!)



Signal propagation ranges

Transmission range


- ❑ communication possible
- ❑ low error rate

Detection range

- ❑ detection of the signal possible
- ❑ no communication possible

Interference range

- ❑ signal may not be detected
- ❑ signal adds to the background noise

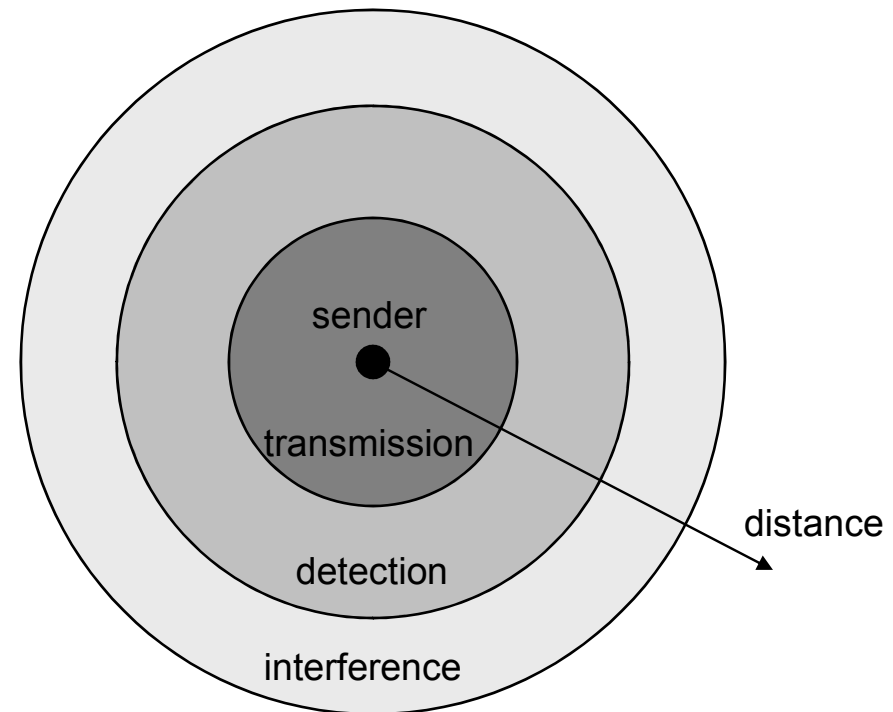

Signal propagation


Propagation in free space always like light (straight line)

Receiving power proportional to $1/d^2$


(d = distance between sender and receiver)

Receiving power additionally influenced by


- ❑ fading (frequency dependent)
- ❑ shadowing
- ❑ reflection at large obstacles
- ❑ refraction depending on the density of a medium
- ❑ scattering at small obstacles
- ❑ diffraction at edges



shadowing



reflection



refraction






scattering



diffraction




Real world example

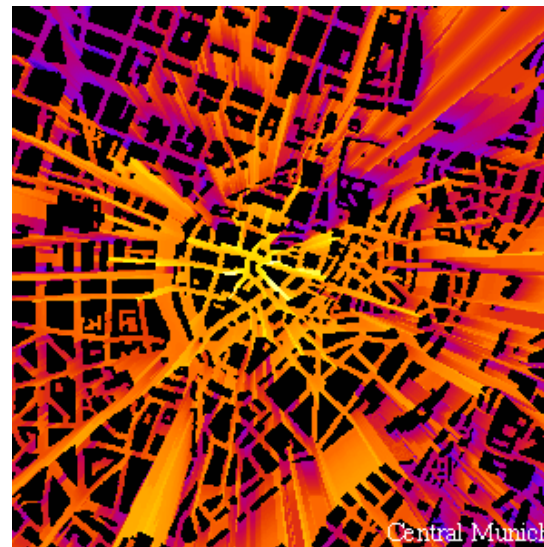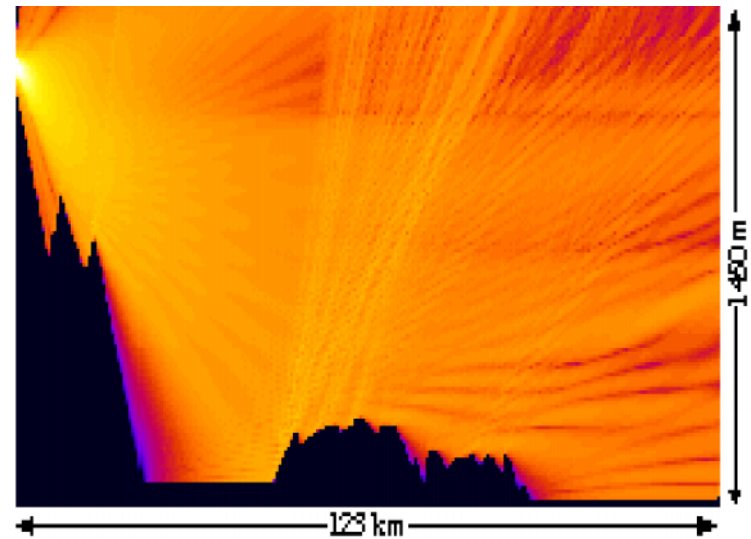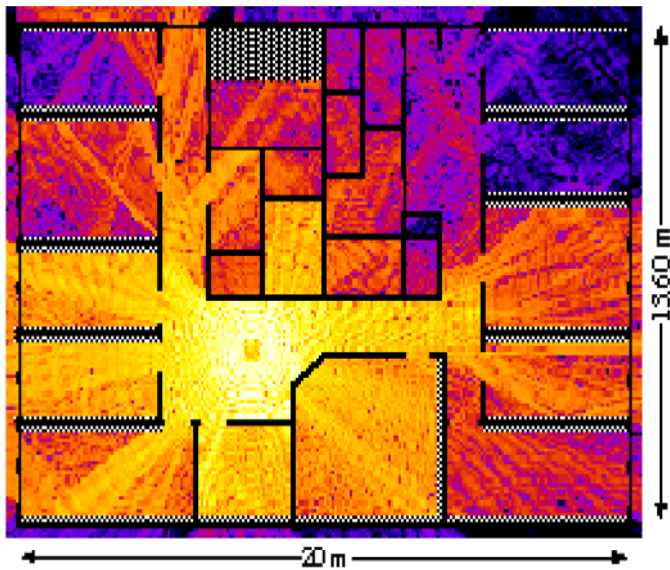

Multipath propagation

Signal can take many different paths between sender and receiver due to reflection, scattering, diffraction

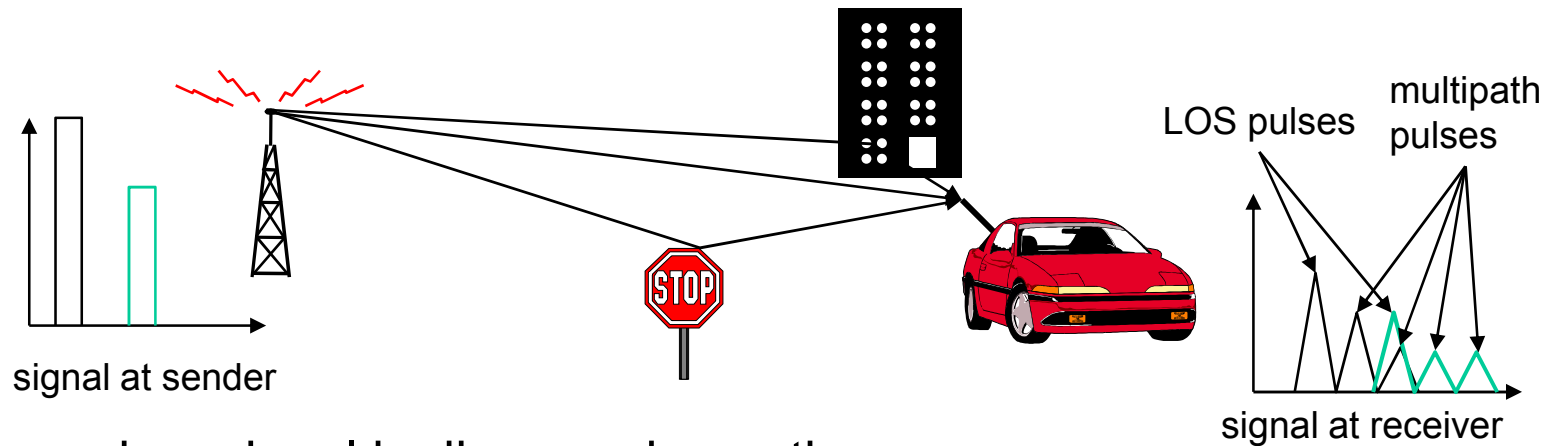

Time dispersion: signal is dispersed over time

→ interference with “neighbor” symbols, Inter Symbol Interference (ISI)

The signal reaches a receiver directly and phase shifted

→ distorted signal depending on the phases of the different parts



Effects of mobility

Channel characteristics change over time and location


- ❑ signal paths change
- ❑ different delay variations of different signal parts
- ❑ different phases of signal parts

→ quick changes in the power received (short term fading)

Additional changes in

- ❑ distance to sender
- ❑ obstacles further away

→ slow changes in the average power received (long term fading)

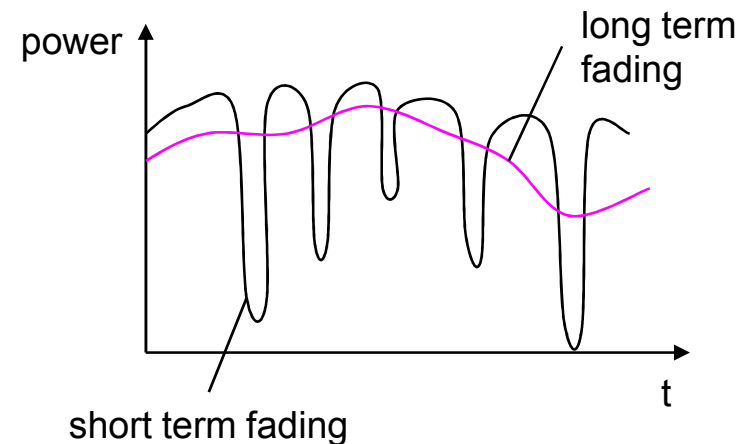

Multiplexing



Multiplexing in 4 dimensions

- ❑ space (s_i)
- ❑ time (t)
- ❑ frequency (f)
- ❑ code (c)

Goal: multiple use
of a shared medium

Important: guard spaces needed!

channels k_i

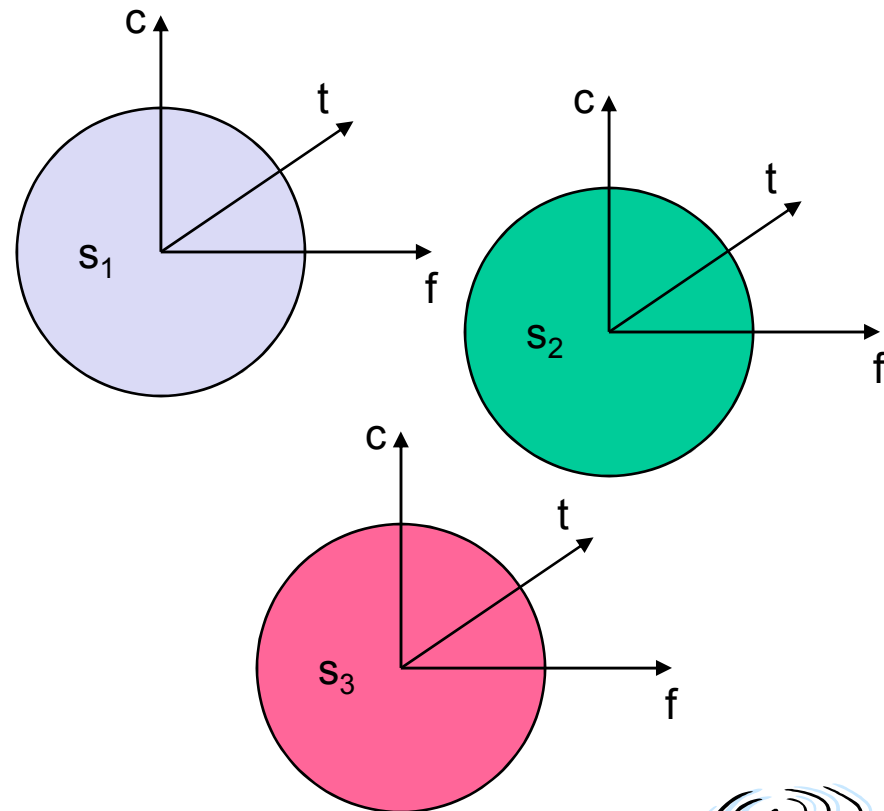

Frequency multiplex

Separation of the whole spectrum into smaller frequency bands


A channel gets a certain band of the spectrum for the whole time

Advantages:

- ❑ no dynamic coordination necessary
- ❑ works also for analog signals

Disadvantages:

- ❑ waste of bandwidth if the traffic is distributed unevenly
- ❑ inflexible
- ❑ guard spaces

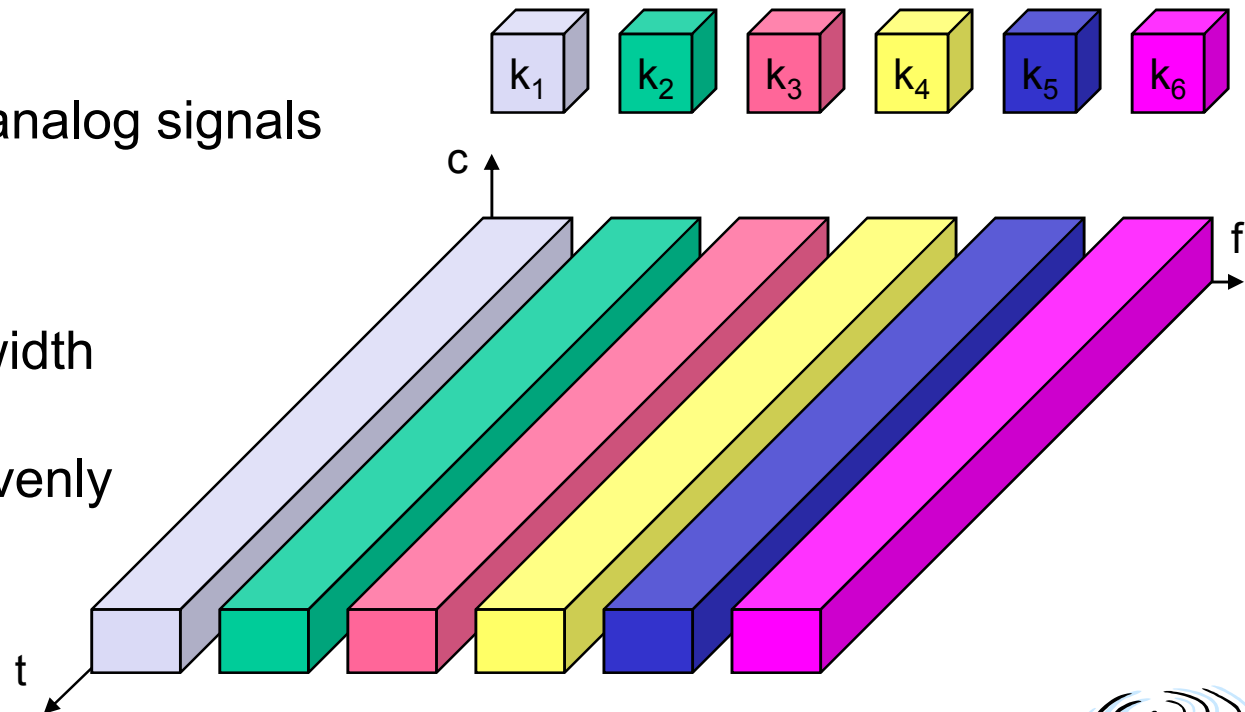


Time multiplex

A channel gets the whole spectrum for a certain amount of time


Advantages:

- ❑ only one carrier in the medium at any time
- ❑ throughput high even for many users



Disadvantages:

- ❑ precise synchronization necessary

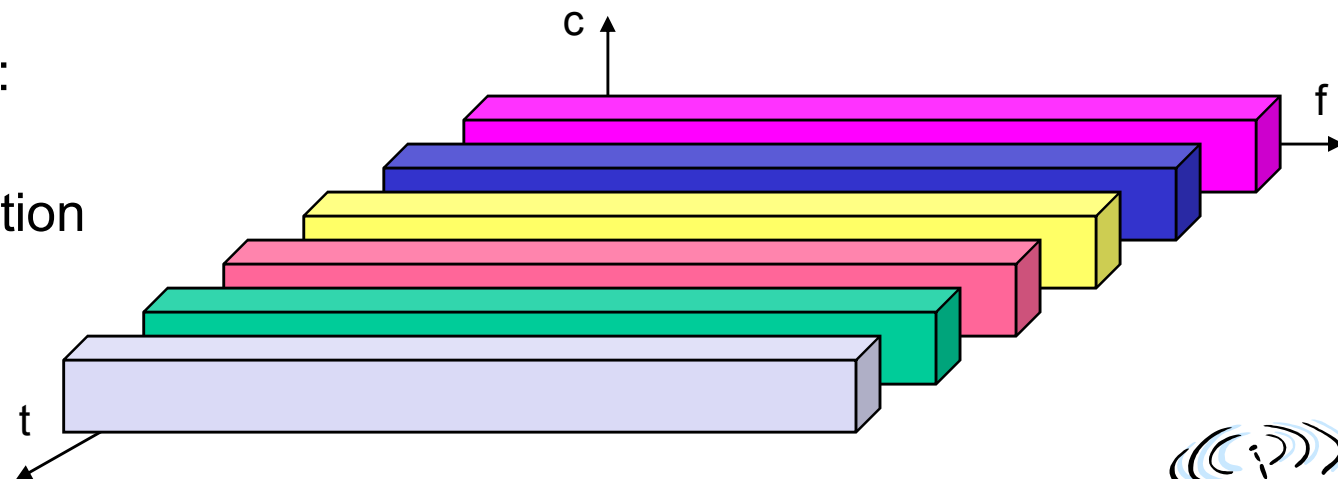

Time and frequency multiplex

Combination of both methods


A channel gets a certain frequency band for a certain amount of time

Example: GSM

Advantages:

- ❑ better protection against tapping
- ❑ protection against frequency selective interference
- ❑ higher data rates compared to code multiplex

but: precise coordination required

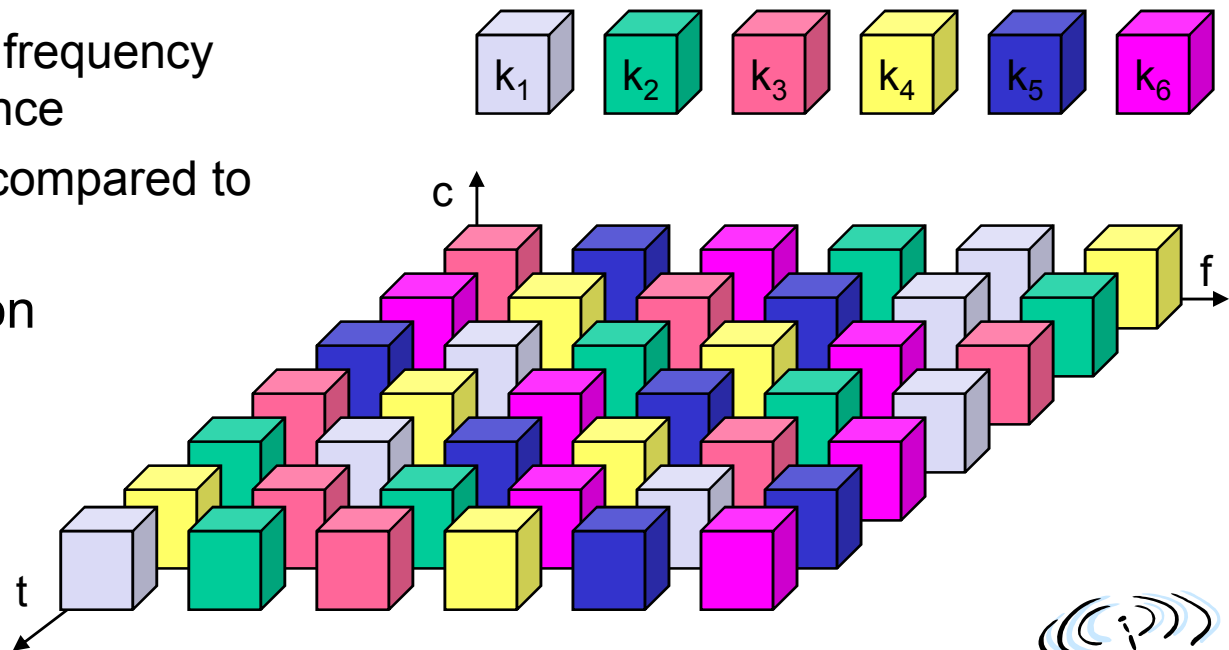

Code multiplex

Each channel has a unique code

All channels use the same spectrum
at the same time



Advantages:

- ❑ bandwidth efficient
- ❑ no coordination and synchronization necessary
- ❑ good protection against interference and tapping

Disadvantages:

- ❑ lower user data rates
- ❑ more complex signal regeneration

Implemented using spread spectrum
technology

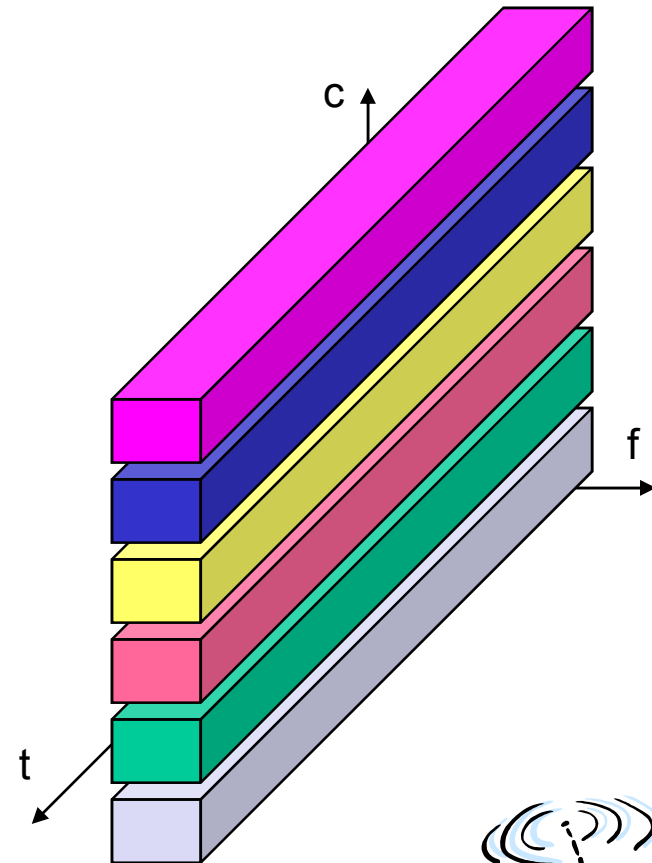

Modulation

Digital modulation

- ❑ digital data is translated into an analog signal (baseband)
- ❑ ASK, FSK, PSK - main focus in this chapter
- ❑ differences in spectral efficiency, power efficiency, robustness

Analog modulation

- ❑ shifts center frequency of baseband signal up to the radio carrier

Motivation


- ❑ smaller antennas (e.g., $\lambda/4$)
- ❑ Frequency Division Multiplexing
- ❑ medium characteristics

Basic schemes


- ❑ Amplitude Modulation (AM)
- ❑ Frequency Modulation (FM)
- ❑ Phase Modulation (PM)



Modulation and demodulation

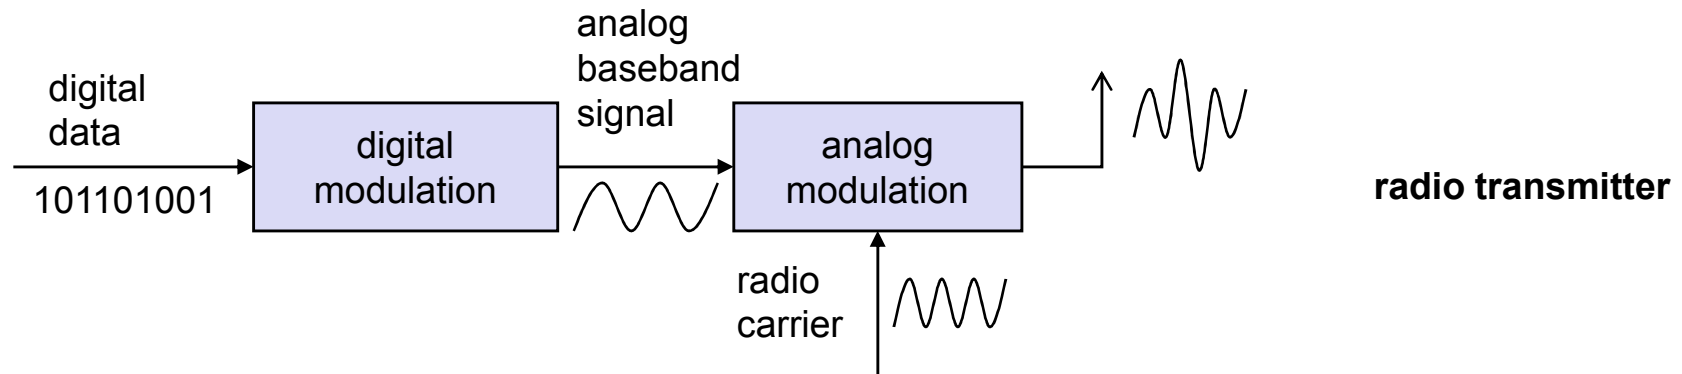

radio transmitter

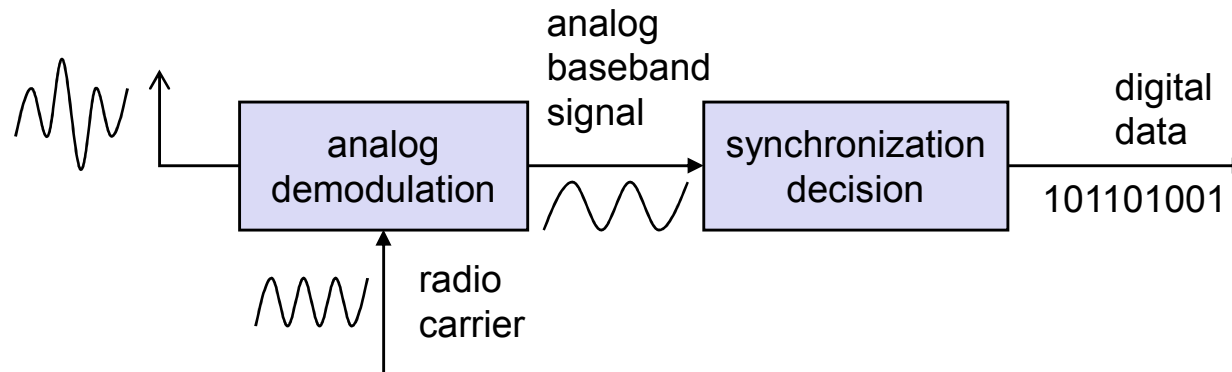

radio receiver




Digital modulation

Modulation of digital signals known as Shift Keying

- ❑ Amplitude Shift Keying (ASK):
 - ❑ very simple
 - ❑ low bandwidth requirements
 - ❑ very susceptible to interference

- ❑ Frequency Shift Keying (FSK):
 - ❑ needs larger bandwidth

- ❑ Phase Shift Keying (PSK):
 - ❑ more complex
 - ❑ robust against interference

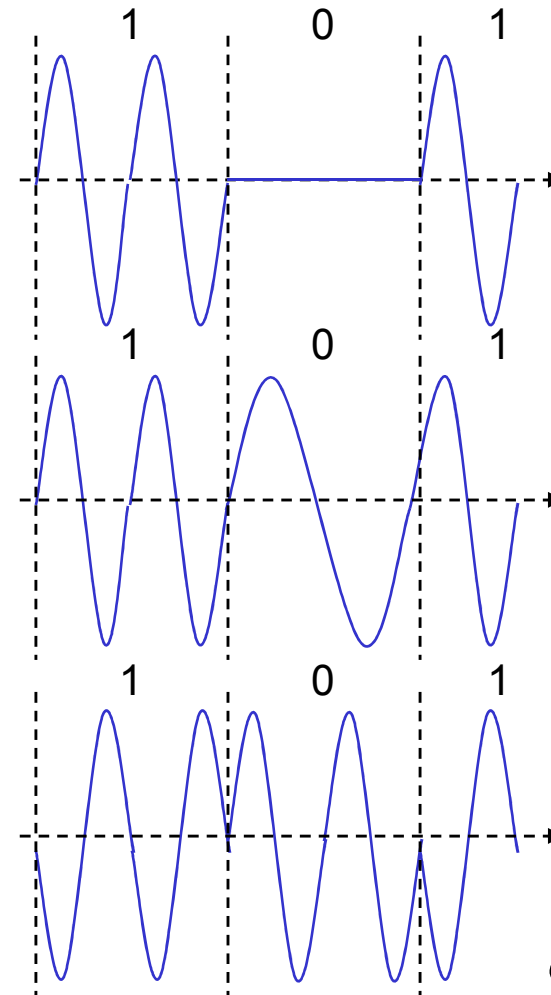

Advanced Phase Shift Keying




BPSK (Binary Phase Shift Keying):

- ❑ bit value 0: sine wave
- ❑ bit value 1: inverted sine wave
- ❑ very simple PSK
- ❑ low spectral efficiency
- ❑ robust, used e.g. in satellite systems

QPSK (Quadrature Phase Shift Keying):

- ❑ 2 bits coded as one symbol
- ❑ symbol determines shift of sine wave
- ❑ needs less bandwidth compared to BPSK
- ❑ more complex


Often also transmission of relative, not absolute phase shift: DQPSK - Differential QPSK (IS-136, PHS)

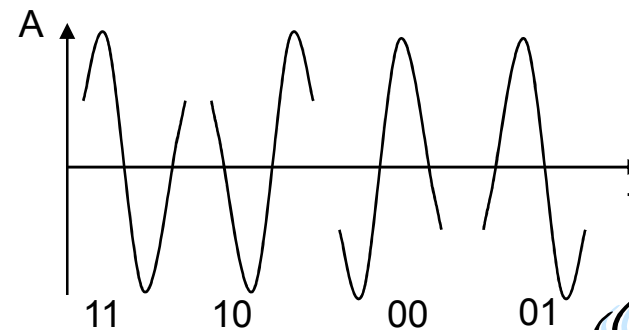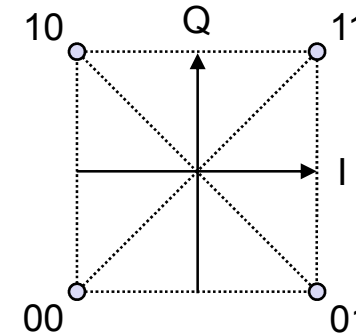

Quadrature Amplitude Modulation

Quadrature Amplitude Modulation (QAM): combines amplitude and phase modulation

- ❑ it is possible to code n bits using one symbol
- ❑ 2^n discrete levels, $n=2$ identical to QPSK
- ❑ bit error rate increases with n , but less errors compared to comparable PSK schemes

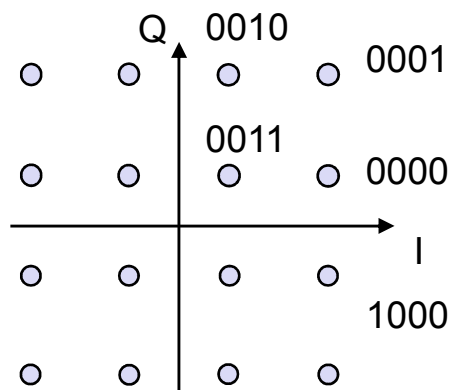

Example: 16-QAM (4 bits = 1 symbol)

Symbols 0011 and 0001 have the same phase, but different amplitude. 0000 and 1000 have different phase, but same amplitude.


➔ used in standard 9600 bit/s modems



Hierarchical Modulation

DVB-T modulates two separate data streams onto a single DVB-T stream

- ❑ High Priority (HP) embedded within a Low Priority (LP) stream
- ❑ Multi carrier system, about 2000 or 8000 carriers
- ❑ QPSK, 16 QAM, 64QAM
- ❑ Example: 64QAM
 - ❑ good reception: resolve the entire 64QAM constellation
 - ❑ poor reception, mobile reception: resolve only QPSK portion
 - ❑ 6 bit per QAM symbol, 2 most significant determine QPSK
 - ❑ HP service coded in QPSK (2 bit), LP uses remaining 4 bit

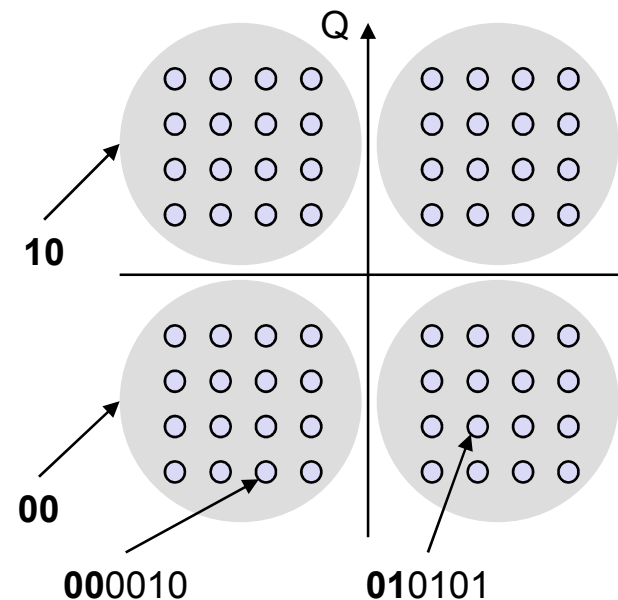


Spread spectrum technology

Problem of radio transmission: frequency dependent fading can wipe out narrow band signals for duration of the interference

Solution: spread the narrow band signal into a broad band signal using a special code

protection against narrow band interference

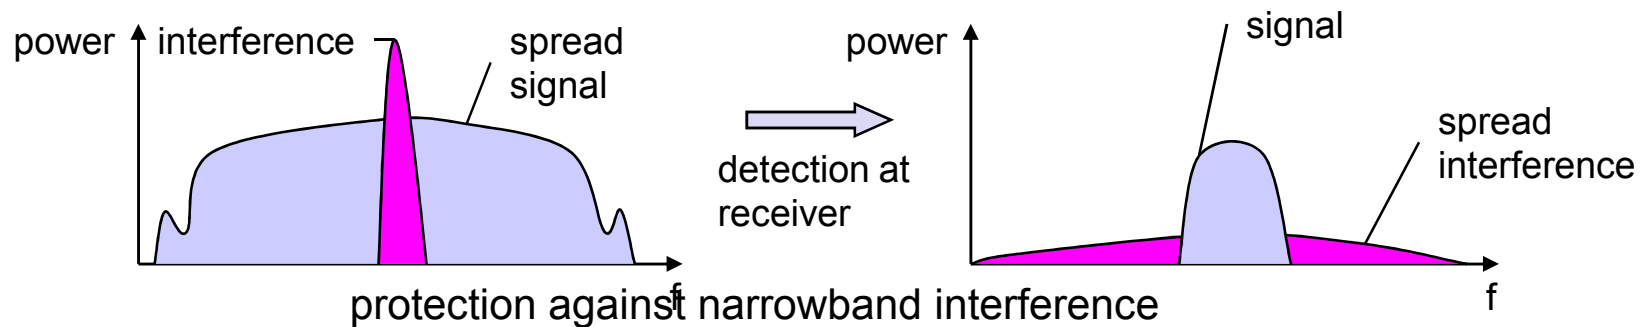


Side effects:

- ❑ coexistence of several signals without dynamic coordination
- ❑ tap-proof


Alternatives: Direct Sequence, Frequency Hopping




Effects of spreading and interference

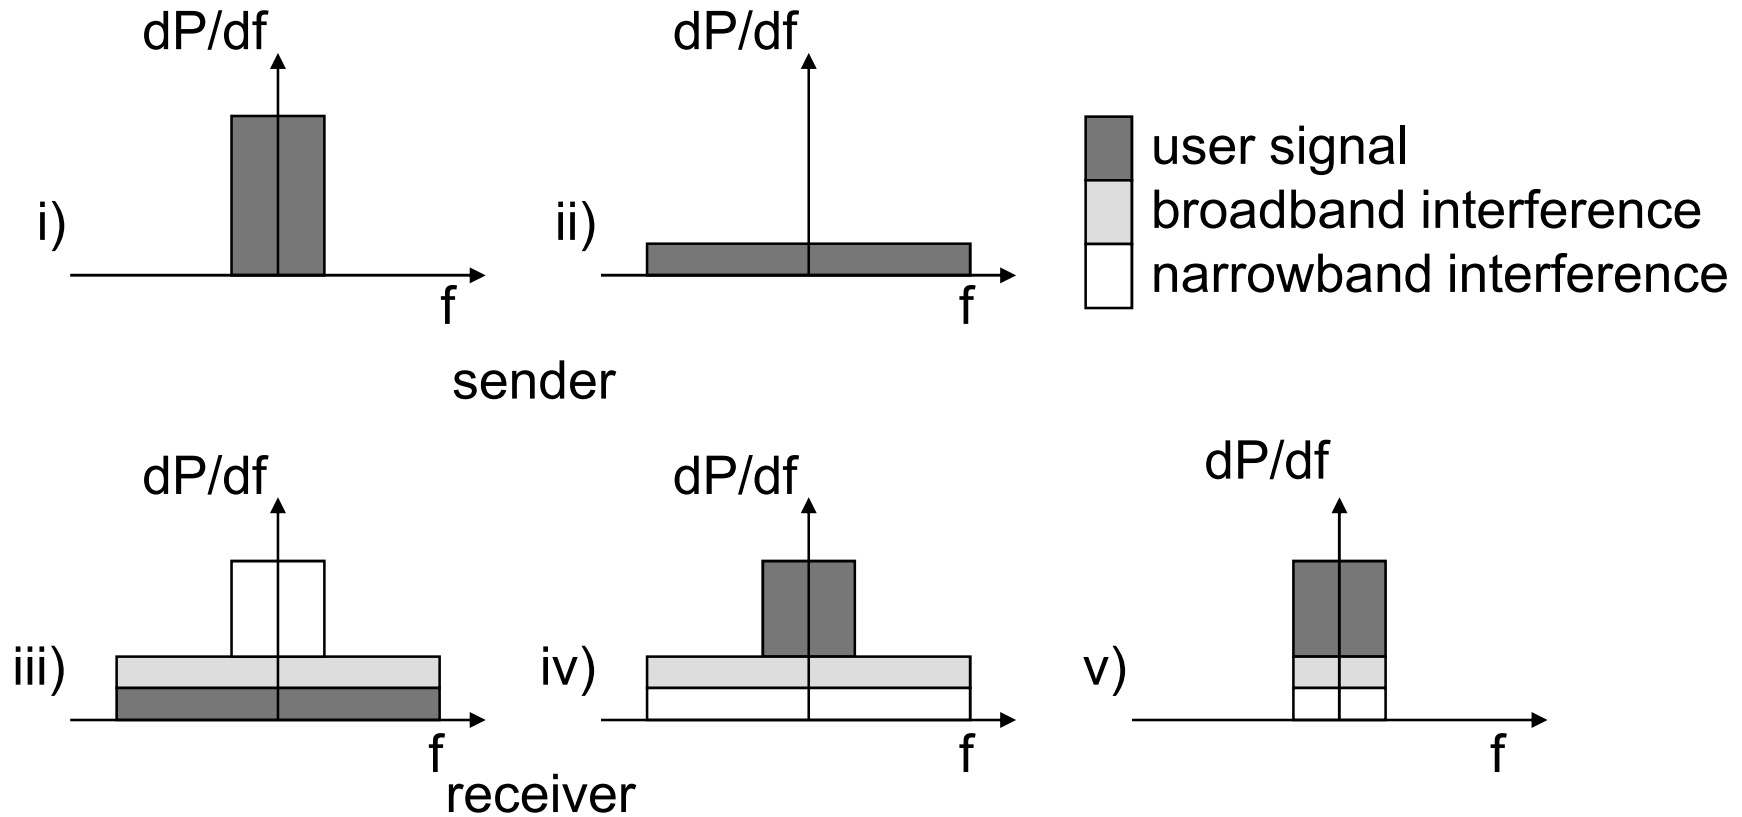

Spreading and frequency selective fading

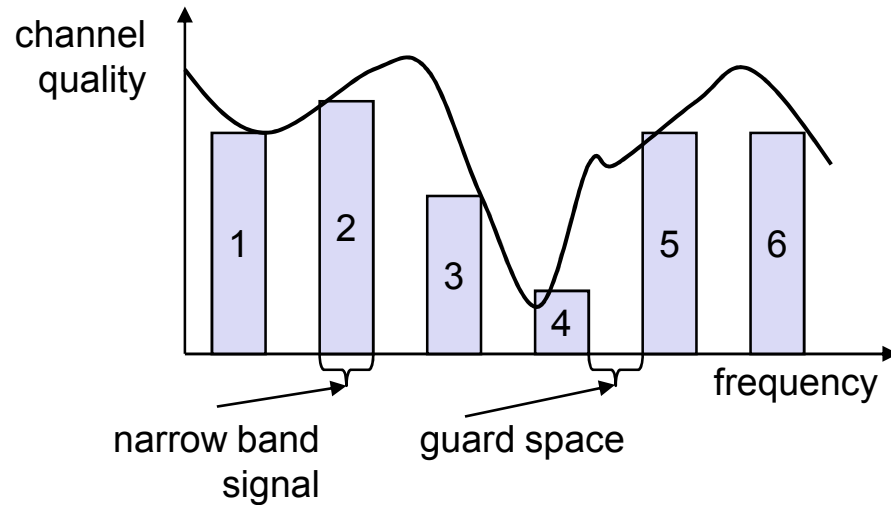

narrowband channels

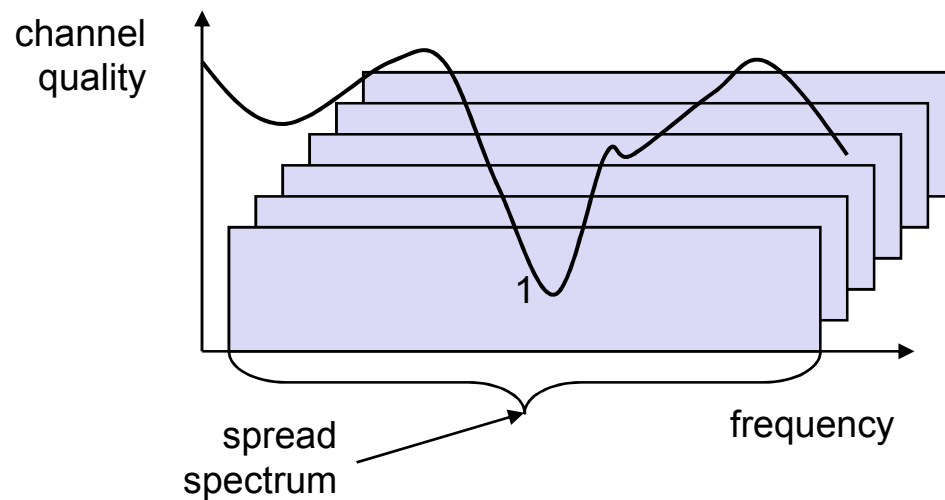

spread spectrum channels



DSSS (Direct Sequence Spread Spectrum) I

XOR of the signal with pseudo-random number (chipping sequence)


- many chips per bit (e.g., 128) result in higher bandwidth of the signal

Advantages

- reduces frequency selective fading
- in cellular networks
 - base stations can use the same frequency range
 - several base stations can detect and recover the signal
 - soft handover

Disadvantages



- precise power control necessary

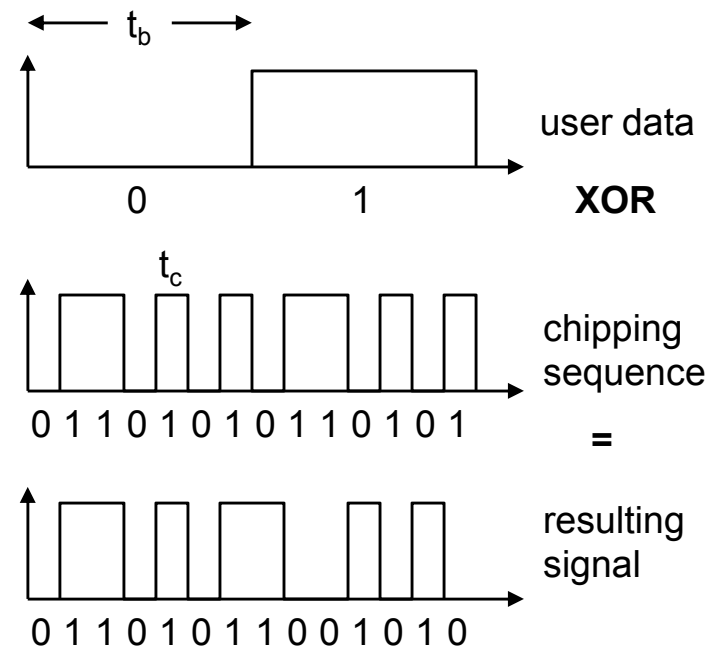

t_b : bit period
 t_c : chip period



DSSS (Direct Sequence Spread Spectrum) II

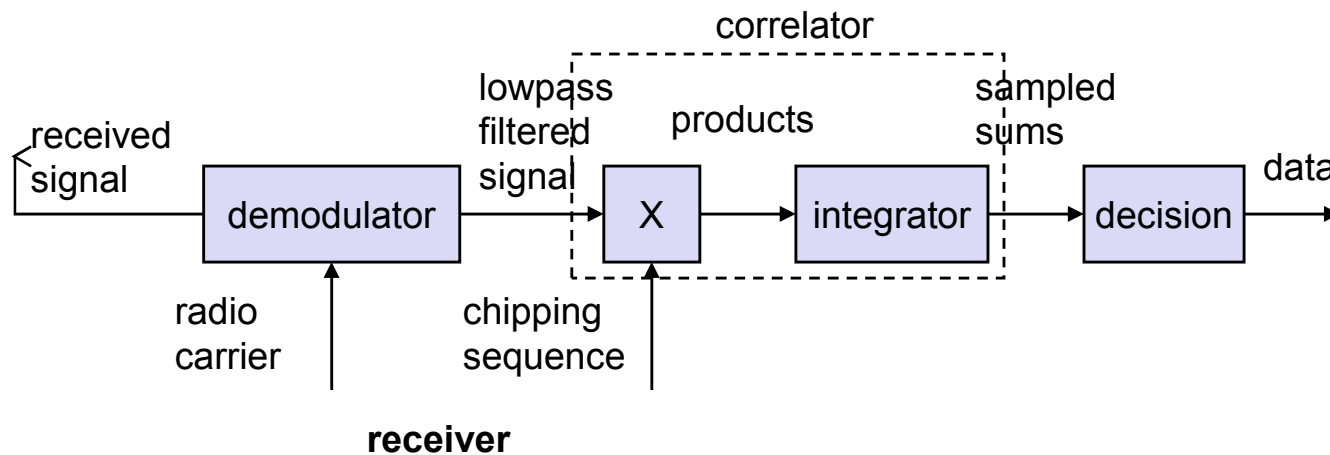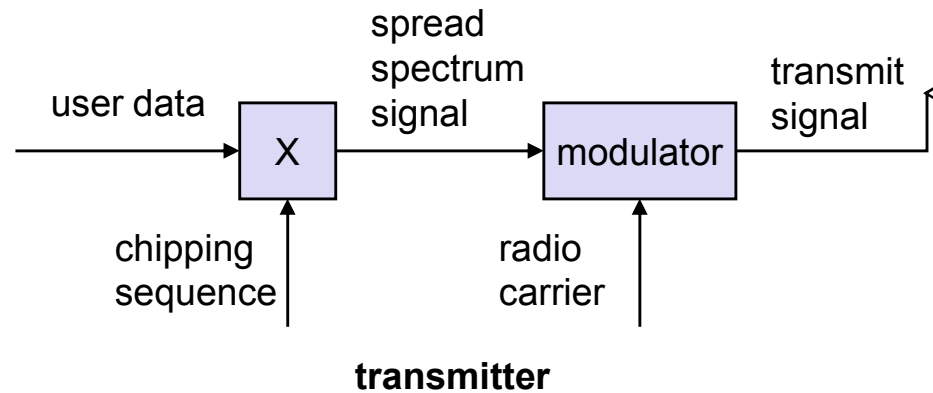

FHSS (Frequency Hopping Spread Spectrum) I

Discrete changes of carrier frequency

- ❑ sequence of frequency changes determined via pseudo random number sequence

Two versions

- ❑ Fast Hopping:
several frequencies per user bit
- ❑ Slow Hopping:
several user bits per frequency

Advantages


- ❑ frequency selective fading and interference limited to short period
- ❑ simple implementation
- ❑ uses only small portion of spectrum at any time

Disadvantages



- ❑ not as robust as DSSS
- ❑ simpler to detect



FHSS (Frequency Hopping Spread Spectrum) II

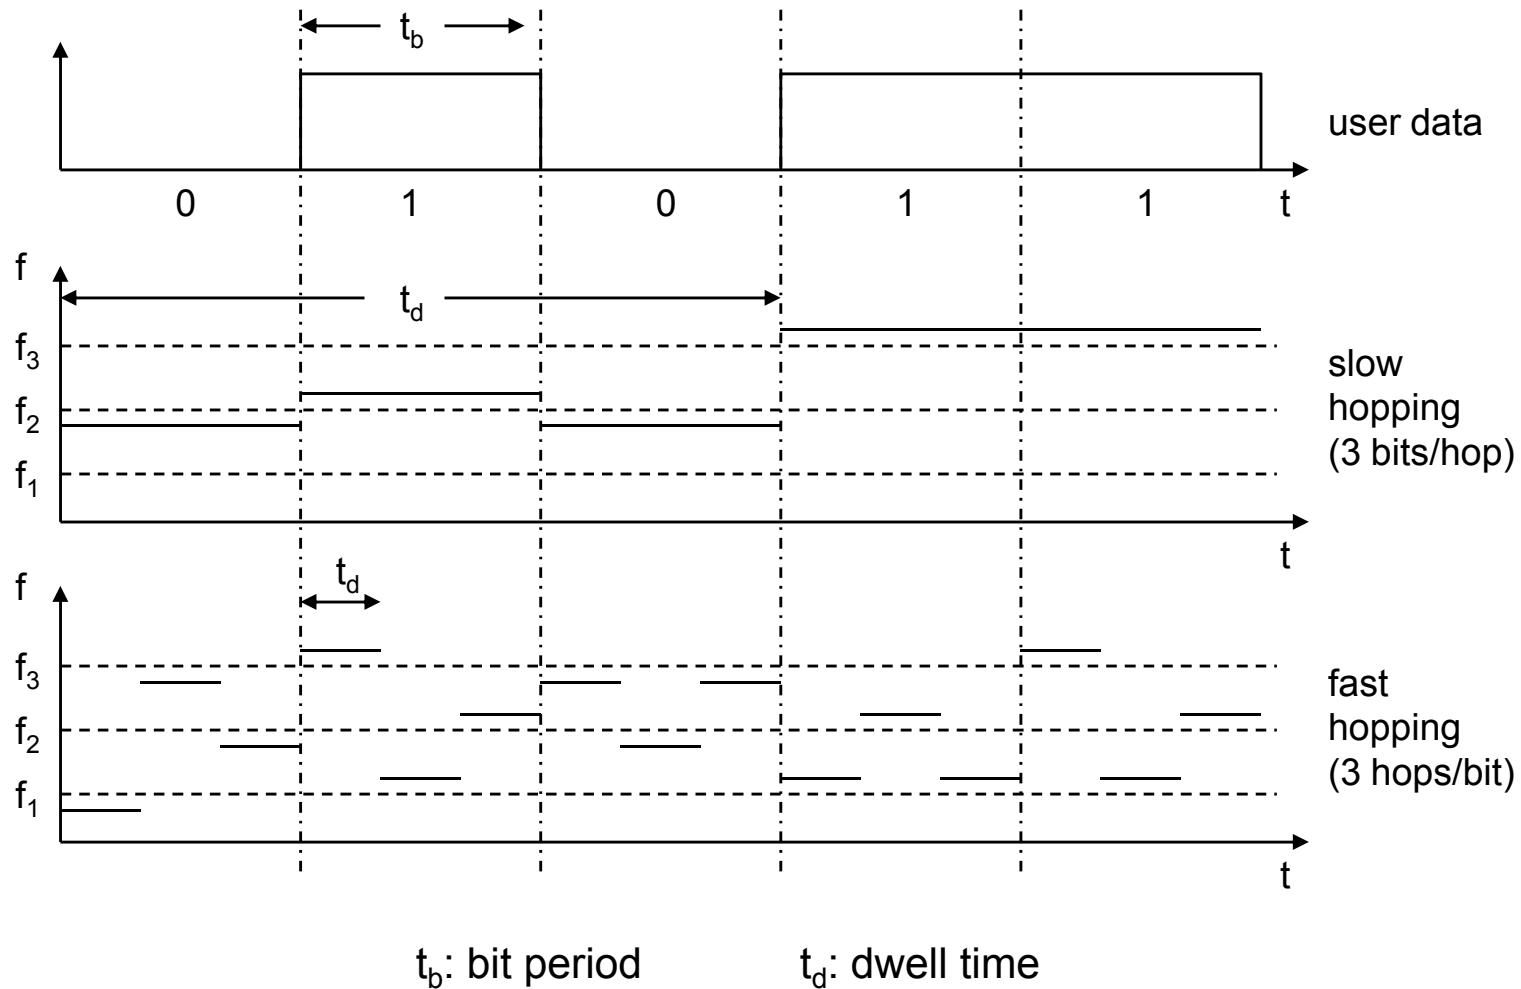

FHSS (Frequency Hopping Spread Spectrum) III

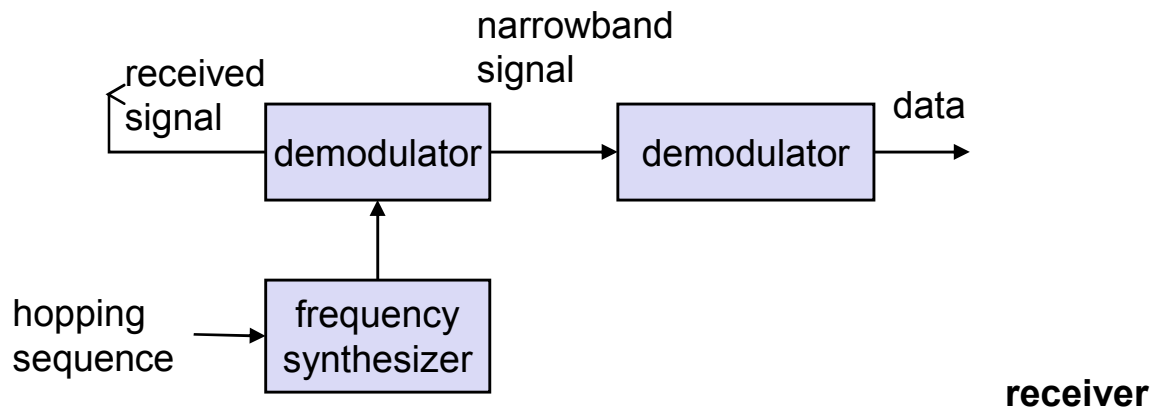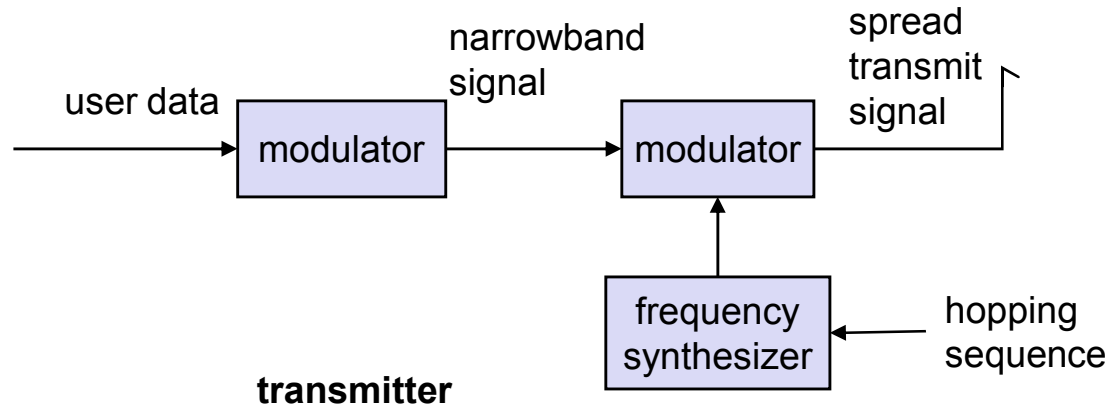

Cell structure

Implements space division multiplex: base station covers a certain transmission area (cell)

Mobile stations communicate only via the base station

Advantages of cell structures:

- ❑ higher capacity, higher number of users
- ❑ less transmission power needed
- ❑ more robust, decentralized
- ❑ base station deals with interference, transmission area etc. locally

Problems:

- ❑ fixed network needed for the base stations
- ❑ handover (changing from one cell to another) necessary
- ❑ interference with other cells


Cell sizes from some 100 m in cities to, e.g., 35 km on the country side (GSM) - even less for higher frequencies



Frequency planning I

Frequency reuse only with a certain distance between the base stations

Standard model using 7 frequencies:

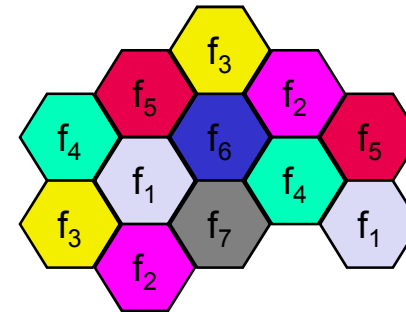

Fixed frequency assignment:


- ❑ certain frequencies are assigned to a certain cell
- ❑ problem: different traffic load in different cells

Dynamic frequency assignment:


- ❑ base station chooses frequencies depending on the frequencies already used in neighbor cells
- ❑ more capacity in cells with more traffic
- ❑ assignment can also be based on interference measurements




Frequency planning II

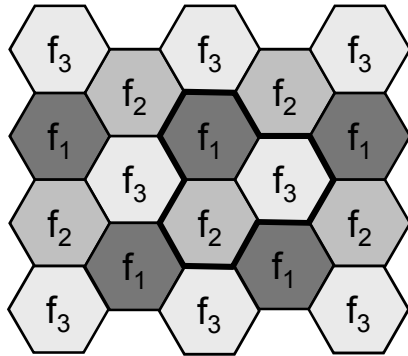

3 cell cluster

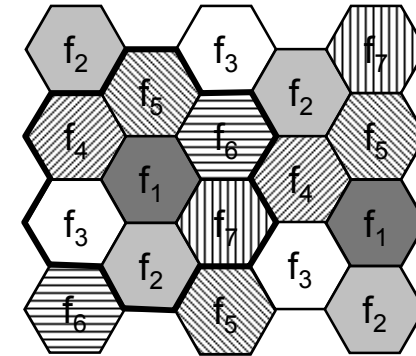

7 cell cluster

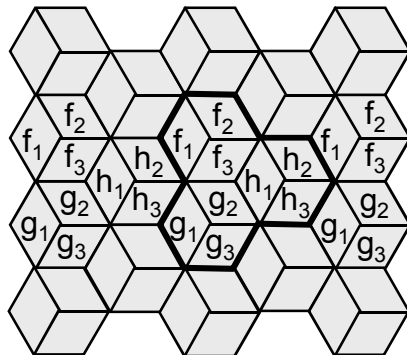

3 cell cluster
with 3 sector antennas



Cell breathing

CDM systems: cell size depends on current load
Additional traffic appears as noise to other users
If the noise level is too high users drop out of cells

